

## 15" Automotive



Type Number: 822009

### Features:



### Specs:

#### Electrical Data

Nominal impedance	Zn	4	ohm
Minimum impedance	Zmin	4.2	ohm
Maximum impedance	Zo	51.2	ohm
DC resistance	Re	3.2	ohm
Voice coil inductance	Le	5.7	mH
Capacitor in series with x ohm	Cc	--	uF

#### T-S Parameters

Resonance Frequency	fs	29.1	Hz
Mechanical Q factor	Qms	7.72	
Electrical Q factor	Qes	0.51	
Total Q factor	Qts	0.48	
Force factor	Bl	18.7	Tm
Mechanical resistance	Rms	7.28	Kg/s
Moving mass	Mms	307	g
Suspension compliance	Cms	0.1	mm/N
Effective cone diameter	D	33.7	cm
Effective piston area	Sd	892	cm <sup>2</sup>
Equivalent volume	Vas	106.9	ltrs
Sensitivity (2.83V/1m)		91.1	dB
Ratio BL/√(Re)		--	
Ratio fs/Qts	F	70	

#### Power handling


100h RMS noise test (IEC)	--	W
Long-term Max Power (IEC 18.3)	--	W
Max linear SPL (rms) @ power	--	dB/W
Short Term Max power (IEC 18.2)	--	W

#### Voice Coil and Magnet Parameters

Voice coil diameter	51	mm
Voice coil height	--	mm
Voice coil layers	--	
Height of the gap	--	mm
Linear excursion +/-	--	mm
Max mech. excursion +/-	--	mm
Flux density of gap	--	mWb
Total useful flux	--	mWb
Diameter of magnet	--	mm
Height of magnet	--	mm
Weight of magnet	--	Kg

Notes:  
IEC specs refer to IEC 60268-5 third edition.  
All Tymphany products are RoHS compliant.

Frequency:

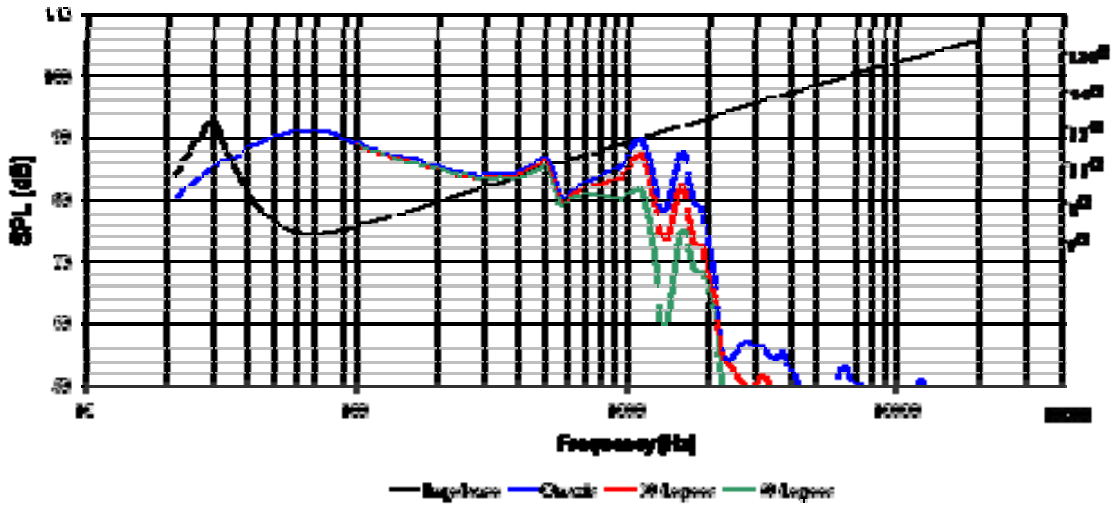

Mechanical Dimensions:

