

## XLS 10" Subwoofer



Type Number: 830452

### Features:

This new series of state-of-the-art subwoofers continue to enhance Peerless' reputation for delivering the highest quality components for bass in the world. Called the XLS - for "Extra Long Stroke" - these new audio transducers add even more excursion, and completely eliminate distortion. See architecture notes for [XLS Platform](#)

Driver Highlights: Thick Nomex cone, 51 mm voice coil, ALP

See application notes for [XLS subwoofer](#)

[Go to Architecture Notes](#)



### Specs:

#### Electrical Data

Nominal impedance	Zn	8	ohm
Minimum impedance	Zmin	4.9	ohm
Maximum impedance	Zo	53.3	ohm
DC resistance	Re	3.4	ohm
Voice coil inductance	Le	4.3	mH
Capacitor in series with x ohm	Cc	22	uF

#### T-S Parameters

Resonance Frequency	fs	18.9	Hz
Mechanical Q factor	Qms	2.63	
Electrical Q factor	Qes	0.18	
Total Q factor	Qts	0.17	
Force factor	Bl	17.5	Tm
Mechanical resistance	Rms	6.12	Kg/s
Moving mass	Mms	135.3	g
Suspension compliance	Cms	0.52	mm/N
Effective cone diameter	D	21.2	cm
Effective piston area	Sd	352	cm <sup>2</sup>
Equivalent volume	Vas	89.7	ltrs
Sensitivity (2.83V/1m)		88.4	dB
Ratio BL/√(Re)		112	
Ratio fs/Qts	F	--	

#### Power handling


100h RMS noise test (IEC)	--	W
Long-term Max Power (IEC 18.3)	--	W
Max linear SPL (rms) @ power	--	dB/W
Short Term Max power (IEC 18.2)	--	W

#### Voice Coil and Magnet Parameters

Voice coil diameter	51	mm
Voice coil height	33	mm
Voice coil layers	4	
Height of the gap	8	mm
Linear excursion +/-	--	mm
Max mech. excursion +/-	--	mm
Flux density of gap	1.04	mWb
Total useful flux	2.5	mWb
Diameter of magnet	147	mm
Height of magnet	35	mm
Weight of magnet	2.42	Kg

Notes:  
IEC specs refer to IEC 60268-5 third edition.  
All Tympany products are RoHS compliant.

Frequency: 830452

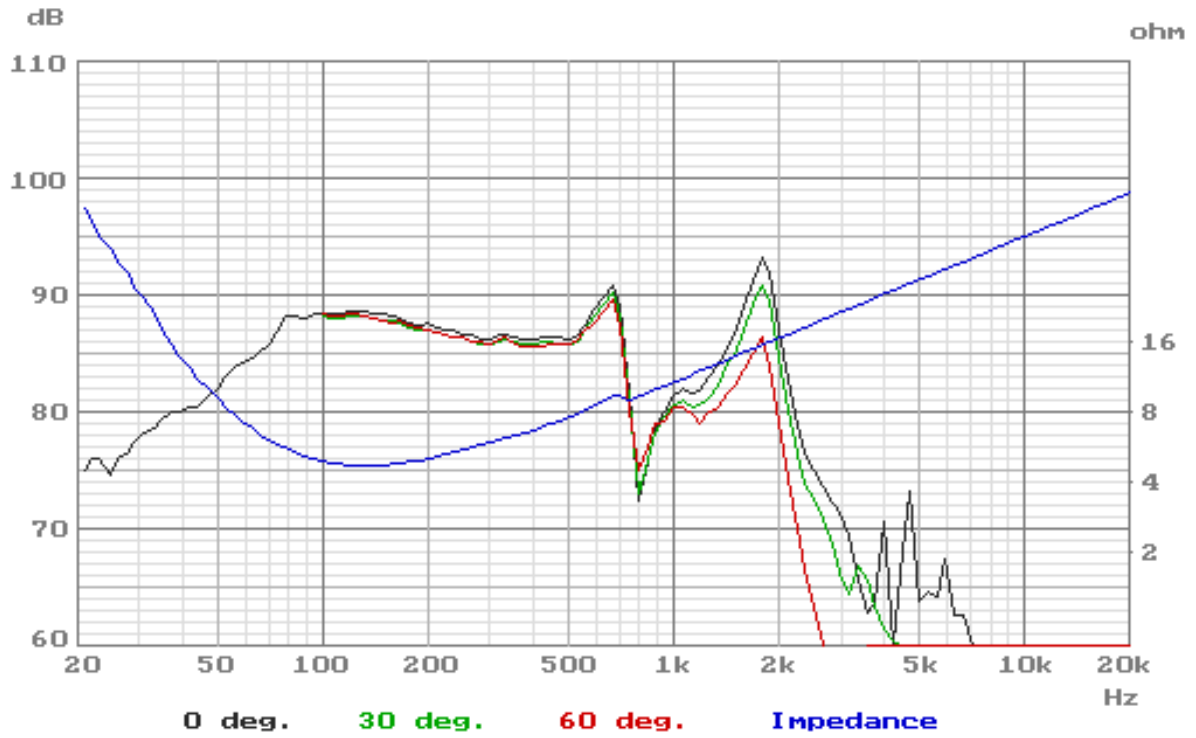

Mechanical Dimensions:830452

